


RX Series

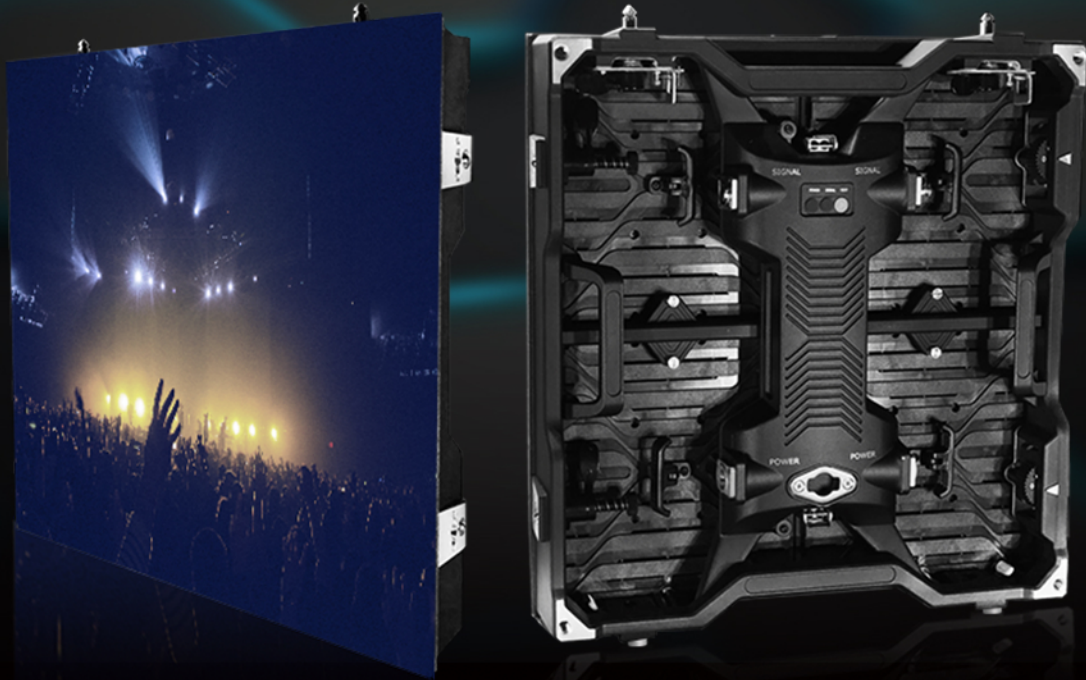

Part Number	RX2.5/2.6	RX2/3	RX(O)3	RX(O)4
Pixel pitch	2.5/2.6mm	2.8/3.9mm	3.9mm	4.8mm
LED type	SMD1010(Black)	SMD2020(Black)	SMD1921(Black)	SMD1921(White)
Pixel configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Size of module	250mmx250mm	250mmx250mm	250mmx250mm	250mmx250mm
Resolution of module	100x100/96x96	88x88/64x64	64x64	52x52
Density(dots/m ²)	160000/147456	123904/65536	65536	43264
Cabinet material	Die-casting	Die-casting	Die-casting	Die-casting
Size of cabinet	500mmx500mm	500mmx500mm	500mmx500mm	500mmx500mm
Weight of cabinet	7.8KG	7.8KG	8.5KG	8.5KG
Support hanging or not	Yes	Yes	Yes	Yes
Max power consumption	600W/m ²	600W/m ²	750W/m ²	750W/m ²
Average power consumption	200W/m ²	200W/m ²	250W/m ²	250W/m ²
Colors	16.7M	16.7M	16.7M	16.7M
Gray scale	16bits	16bits	16bits	14bits
Color temperature	3000-10000K	3000-10000K	3000-10000K	3000-10000K
Driving method	1/25,1/24 scanning	1/22,1/16scanning	1/16 scanning	1/9 scanning
Refresh frequency	3000Hz	3000Hz	3000Hz	1920Hz
Brightness	800cd/m ²	900cd/m ²	3500/4500cd/m ²	5000cd/m ²
Brightness control	256 grade	256 grade	256 grade	256 grade
IP grade	IP30	IP30	IP65	IP65